



**EXTENDIBLE TONGUE POLE TRAILER 15K
MODEL # A53-7860**

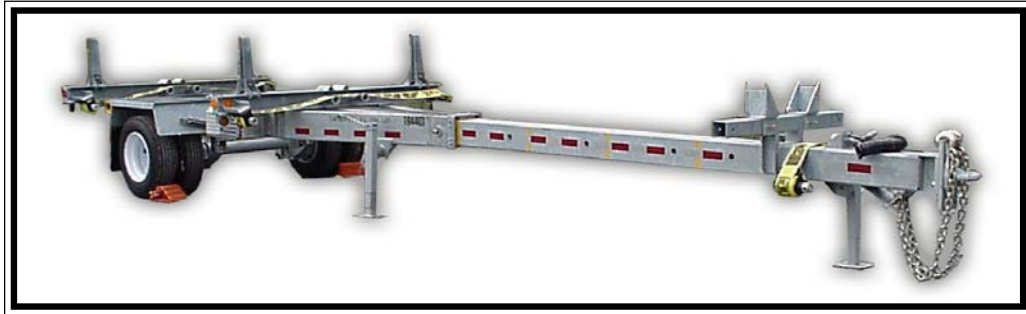

Trailer shown with optional equipment

General:	GVWR:	15,000 lbs.
	Rated Payload	11,150 lbs.
	Est. Empty Weight:	3,850 lbs.
	Overall Dimensions:	20' 7¾" x 90" x 56" (L x W x H) Extended length - 29'
	Bolsters	(3) H - 36½" w/ binder hub and winches (Two full width)
	Jack:	(2) 7,000 lb. swiveling w/ side crank
	Hitch:	3" pintle eye (adjustable, 20¼" - 29¼")
	Fenders:	12 ga. tread plate with mud flaps
	Safety Chains:	½" with hook and latch
Running Gear:	Axles:	(1) - 15,000 lb. sprung axle with oil bath
	Brakes:	Electric, 12¼" x 5" self adjust with breakaway system
	Tires:	Dual, Size: 215/75R17.5 Ply: Load Range H @125 PSI
	Wheels:	Dual steel 17.5"x 6.75" HC Bolt circle: 8 lugs on 10-7/8"
Frame Structural:	Frame:	Mat'l : 4" x 10" x ¼" tubing
	Tongue:	Mat'l : 8" x 8" x ¼" inner tube, 10" x 10" x ¼" outer tube
	Stanchions:	(4) adjustable pole stanchions; pole chocks on front bolster
Finish:	Prep:	Iron phosphate conversion treatment, chromium free post treatment.
	Primer:	Epoxy ester high solids primer
	Top Coat:	Polyurethane two component high solids enamel
Lighting:	To D.O.T. Specifications	
Wire Harness:	Continuous, no splices	
Electrical Connection:	7 Prong receptacle	
Special features:	(3) - 4" Pole binders w/ ratchet type heavy duty 6,000 lb. winches to secure poles, 20' 5000 lb. min. nylon strap, Tongue extends 10', Flexible cable carrier to protect tongue wires, Bronze bushings on tongue receiver, Aluminum light bar, Umbelical cord on the light bar, Document holder, Winch handle, and Frame mounted tool box	
Options:	Wheel chocks, Hot dipped galvanized finish in lieu of paint, Anti-skid tape or paint on fenders, Tongue, and A-frame, LED lighting, Solar battery	

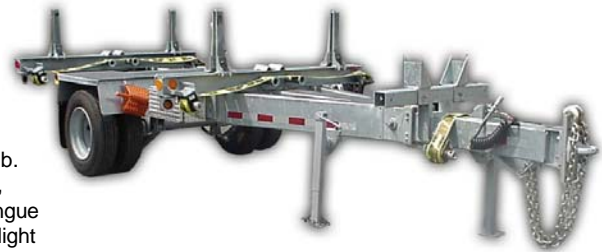

MGS Incorporated