


A56-6458 PIPE HAULING TRAILER

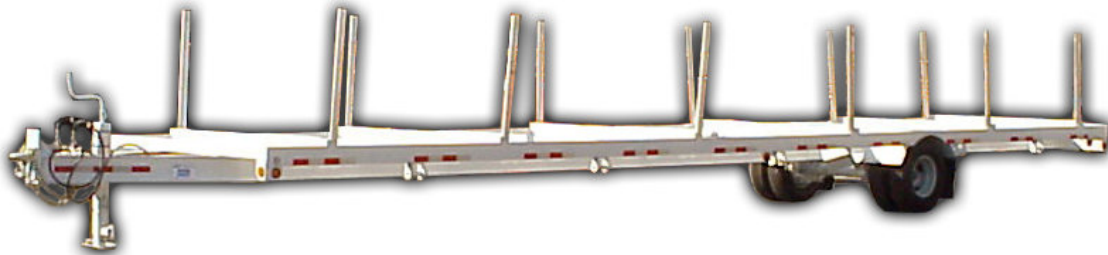

General:	GVWR:	10,000 lb.
	Rated Payload:	7,400 lb.
	Est. Empty Weight:	4,200 lb.
	Overall Dimensions:	(L x W x H) 45'2" x 98" x 34.5" (75" with stakes)
	Bed Dimensions:	40' x 83" x 34.5" (L x W x H)
	Tongue Jack:	10,000 lb.
	Hitch:	3" Pintle Eye, 27 3/4" center position adjustable \pm 4.5"
	Safety Chains:	3/8" x 40" grade 70, w/ clevis hook and safety latch
Running Gear:	Axle:	(1) 10,000 lb. Sprung
	Brakes:	Air with ABS (2S, 1M)
	Tires:	LT23585R16 Ply: Load Range E
	Wheels:	Rim: steel Bolt circle: 8 on 6.5
Frame Structural:	Mat'l:	W8 x 15 "H" Beam
	Cross members:	4" x 2" x 1/8" and 2" x 6" x 1/8" rect. steel tube.
Finish:	Preparation:	Iron phosphate conversion treatment, Chromium - free post treatment
	Primer:	Epoxy ester high solids primer
	Topcoat:	Polyurethane two component high-solids enamel
Lighting & Reflectors:		To DOT specifications. All sealed with rubber isolation mount.
Wire Harness:		"Truck- Lite" with "Truck- Lite" junction boxes
Electrical Connection:		Matched to customer request (7-pin min required)
Added Features:		12 - 48" x 2.5" dia. schedule 40 Aluminum uprights with positive spring latch (6 per side) 5 - 4" ratchet binders for securing load