


## 6" COIL CAGER MODEL# CL696T



- |                                   |   |  |
|-----------------------------------|---|--|
| <b>General:</b>                   | GVWR:   | 11,000 lb.   |
|                                   | Rated Payload:  | 5,220 lb.  |
|                                   | Est. Empty Weight:  | 5,780 lb. includes cage and tamer                            |
|                                   | Overall Dimensions:   | 308" x 96" x 140" (L x W x H)                                |
|                                   | Tongue Jack:  | 10,000 lb. Top wind  |
|                                   | Hitch:  | 3" Pintle Eye, adjustable                                    |
|                                   | Safety Chains:  | 3/8" x 40" grade70, w/ clevis hook and safety latch          |
| <b>Running Gear:</b>              | Axles: (2) 5,000 lb.  |  |
|                                   | Brakes: Electric  |  |
| <b>Tires:</b>                     | Size:225/75R15  | Ply: Load Range D  |
| <b>Wheels:</b>                    | Rim: steel  | Bolt circle: 6 on 5.5  |
| <b>Frame Structural:</b>          | Mat'l:  | 8" steel channel   |
| <b>Finish:</b>                    | Prep:   | Iron phosphate conversion treatment, chromium free post tmt. |
|                                   | Primer:   | Epoxy ester high solids primer                               |
|                                   | Top Coat:   | Polyurethane two component high solids enamel.               |
| <b>Lighting &amp; Reflectors:</b> | To DOT specifications. All sealed with rubber isolation mount.  |  |
| <b>Wire Harness:</b>              | Continuous 5/16" Diam. Protective Loom  |  |
| <b>Electrical Connection:</b>     | Matched to customer request (6-pin min required)  |  |
| <b>Coil Dimensions:</b>           | Max width - 60", Max O.D. - 132", Min I.D. - 68"<br>Max weight - 2600 lb.   |  |
| <b>Re-rounder:</b>                | McElroy Line Tamer capable of re-rounding 3" - 6"IPS<br>4" - 6" rollers are standard, 3" available.   |  |
| <b>Special Features:</b>          | Hydraulically actuated cage and threader bar for front, rear or top loading, 6 1/2" top support roller, multiple roller guides, Honda 5HP hydraulic power source. |  |

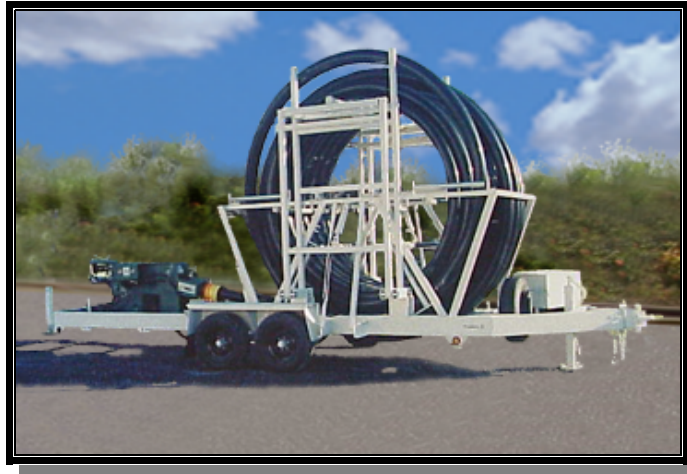