


Model # ECS20011 Self-Loading Cable Reel Trailer

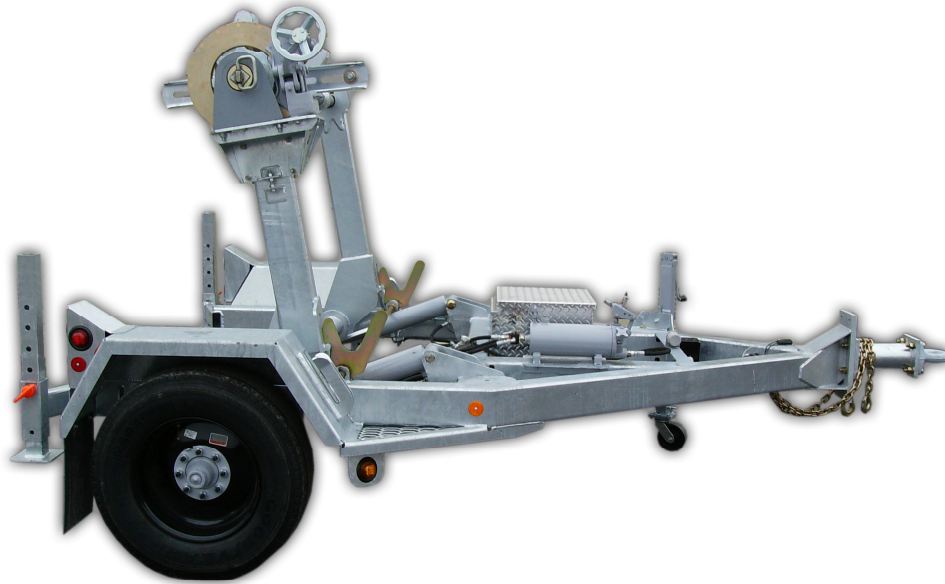

Trailer picture above may be shown with Optional Items.

General:

GVWR:	9000 lbs.
GAWR:	8000 lbs. (per axle)
Empty Weight:	2460 lbs.
Total Capacity:	6500 lbs.
Unladen Hitch Wt	370 lbs. approx.
Overall Dimensions:	149 7/8" x 95 15/16" x 78 13/16" (L x W x H)
Reel Opening Dimensions:	62 1/2" x 60 1/2" (L x W)
Hitch:	3" Eye, 4 Bolt, 60,000 lb. Gross Trailer Wgt.
Safety Chains:	3/8" Grade 70 w/ 3/8" Clevis Hooks and Safety Latches

Running Gear:

Tires:	Size: 245/70R 17.5 LRH
Wheels:	17.5 x 6.75" with 8 bolts on a 6.5" bolt circle
Brakes:	Electric
Axles:	8000 lbs. Dexter Underslung Type

Frame:

Frame Rails:	6 x 4 x 1/4" Wall Tube ASTM A500B
Cross Members:	6 x 4 x 1/4" Steel Tubing ASTM A500

Reel Carrier:

Reel Size:	Max. 54" wide x 82" dia.
Reel Shaft:	2 1/2" Diameter Galvanized Steel
Tensioning Brake:	16" Ventilated Bronze Manual Disk Brake

Finish: Hot dipped galvanizing

Electrical:


Wire Harness:	No Internal Splices, enclosed in protective loom.
Breakaway system:	To Federal DOT standards w/ solar maintainer
Electrical Connection:	7 pin plug
Lighting/Conspicuity:	Lighting To Federal D.O.T. Standards. Conspicuity

Other:

Tongue jack:	7000 lb. Capacity, Dropfoot Pivot Sidewind
Registration holder:	water tight

Special Features: (18" X 18" X 14") Aluminum Toolbox w/ Paddle Handle and Cylinder Lock, (2) Rear Stabilizers, Wheel Chock Holder, (2) Frame Steps, Hitch Extension, (2) 3000 psi Hydraulic Cylinders, Hydraulic Hand Pump, Grounding Kit, Bolt on (3) Bar Light Box

Optional Equipment: Hand pump in lieu of truck circuit. Electric over hydraulic HPU with battery maintainer, 6.5 HP HPU,

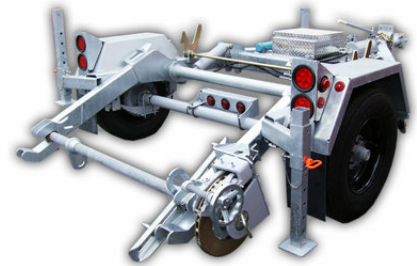

MGS Incorporated