




PUBLIC UTILITY TRANSPORTATION SYSTEMS

LTSLSPU0142 7/09

GSP10004 TELESCPIC PIPE TRAILER

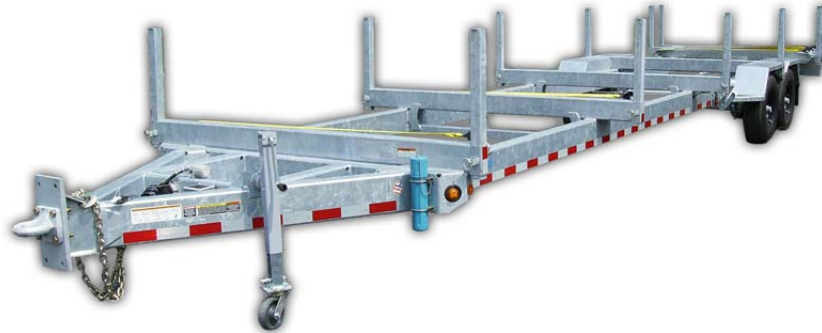

- | | | |
|--------------------------|--|--|
| General: | GVWR: | 15,400 lbs. |
| | GAWR: | 7,000 lbs. (per axle) |
| | Empty Weight: | 4,600 lbs. |
| | Total Capacity: | 10,800 bs. |
| | Unladen Hitch Wt (retracted): | 920 lbs. |
| | Overall Dimensions: | 34.5' x 8' x 7' (L x W x H) |
| | Deck Dimensions: | 21'9" x 5'-7" x 27 3/4" (L x W x H) |
| | Hitch: | 3" towing eye, adjustable 60,000# rating |
| | Safety Chains: | 1/2" steel chains with clevis slip hooks |
| Running Gear: | Tires: | Size: 235/80R16 |
| | Wheels: | 16" with 8 bolts on a 6.5" bolt circle |
| | Brakes: | Electric |
| | Axles: | (2) 7,000lbs. Dexter Spring Type |
| Frame: | Frame Rails: | Mat'l: 8" x 4" x 1/4 A500B |
| | Cross Members: | Mat'l: 8" x 4" x 1/4 A500B |
| Finish: | Hot dipped galvanizing | |
| Electrical: | Wire Harness: | No Internal Splices, enclosed in protective loom. |
| | Breakaway system: | To Federal DOT standards w/ solar maintainer |
| | Electrical Connection: | 7pin plug |
| | Lighting/Conspicuity: | Lighting To Federal D.O.T. Standards. Conspicuity tape where practicable |
| Other: | Tongue jack: | 7,000 lb. Capacity, Top Wind |
| | Registration holder: | water tight |
| Special Features: | Drop down side posts, Rear section telescopes 10'. Telescopic section rides on greasable roller wheels and sintered bronze bushings. Wire mesh storage area in tongue, four 3" web winches with safety release and winch bar | |



MGS Incorporated

178 Muddy Creek Church Rd. Denver, PA 17517 Phone: 800-952-4228 Fax: 717-336-0514 Email: cmcquate@mgsmail.com