


UTL-110 PIPE HAULING TRAILER

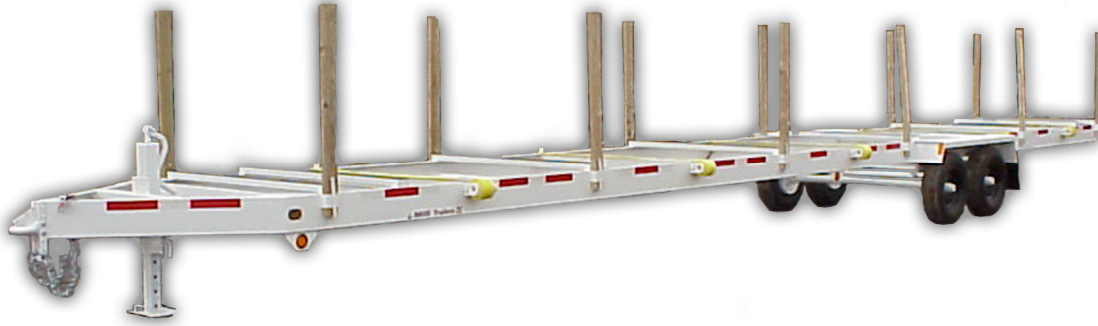

General:	GVWR:	10,000 lb.
	Rated Payload:	5,000 lb.
	Est. Empty Weight:	1,900 lb.
	Overall Dimensions:	45'1" x 87" x 43" (75" with stakes)
	Bed Dimensions:	40' x 62" x 34"(L x W x H)
	Tongue Jack:	10,000 lb.
	Hitch:	3" Pintle Eye, adjustable
	Safety Chains:	3/8" x 40" grade70, w/ clevis hook and safety latch
Running Gear:		
	Axles: (2) 5,000 lb.	Brakes: Electric
Tires:	Size: 225/75R15	Ply: Load Range D Type: High speed Trailer
Wheels:	Rim: steel	Bolt circle: 6 on 5.5
Frame Structural:		
	Mat'l:	C8 x 11.5 structural channel
	Cross members:	4x2x3/16 formed steel and 4x2x3/16 rect. steel tube.
Finish:		
	Preparation:	Iron phosphate conversion treatment, Chromium - free post treatment
	Primer:	Epoxy ester high solids primer
	Topcoat:	Polyurethane two component high-solids enamel
Lighting & Reflectors:		
	To DOT specifications. All sealed with rubber isolation mount.	
Wire Harness:	Continuous 5/16" Diam. Protective Loom	
Electrical Connection:		
	Matched to customer request (6-pin min required)	
Other:	Wood, removable side posts for easy loading	