




**PUBLIC UTILITY
TRANSPORTATION SYSTEMS**
LTSLSPU0103 04/03

**POLE/CARGO TRAILER
MODEL# A53-5137**

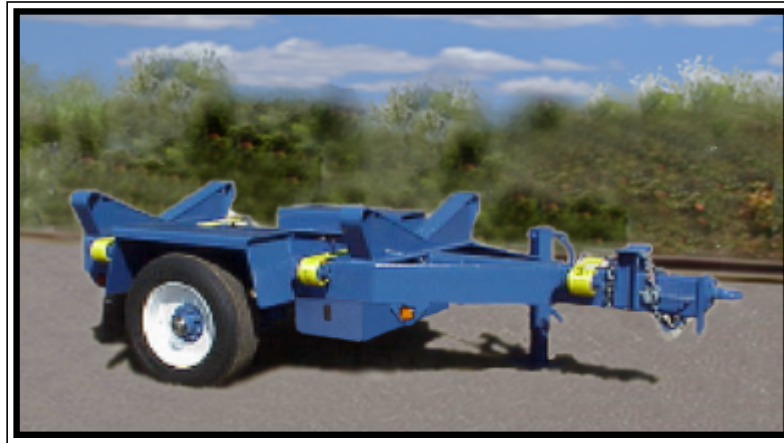

| | | |
|--------------------------|------------------------|--|
| General: | GVWR: | 9700 lb |
| | Est. Empty Weight: | 1900lb |
| | Overall Dimensions: | 146 1/8" x 77" x 30" (L x W x H) |
| | Bolster Height: | 39 3/16" |
| | Hitch: | 3" Pintle Eye |
| | Safety Chains: | 3/8" x 40" grade 40, w/ clevis hook and safety latch |
| Running Gear: | Axles: | 9000lb capacity sprung axle |
| | Brakes: | 12-14" x 3 3/8" electric brakes |
| | Tires: | Size: 9R17.5HC |
| | Wheels: | Rim : Conventional Steel Bolt circle: 8 bolts on 6.5" circle |
| Frame Structural: | Frame Rails: | Mat'l: C8 x 11.5 Structural channel |
| Cargo Area: | Floor Mat'l: | 7ga HR sheet |
| | Size: | 67 1/4" x 43 1/2" x 8" (L x W x H) |
| Finish: | Preparation: | Iron phosphate conversion treatment, chromium-free post treatment |
| | Primer: | Epoxy ester high solids primer |
| | Top Coat: | Polyurethane two component high-solids enamel |
| Electrical | Wire Harness: | No Internal Splices, Enclosed in Protective Loom |
| | Connection: | 6-Prong receptacle min. |
| | Lighting: | To Federal DOT specifications |
| Other | Trailer Supplied with: | Pole Muzzle, Rear Light Bar with umbilical cord and (2) Tie-down straps for securing Pole. |

MGS Incorporated

178 Muddy Creek Church Rd. Denver, PA 17517

Phone: 800-952-4228 Fax: 717-336-0514

Email:cmcquate@mgsmail.com