


# Model # ECS20039 Electric/Hydraulic Self-Loading Cable Reel Trailer

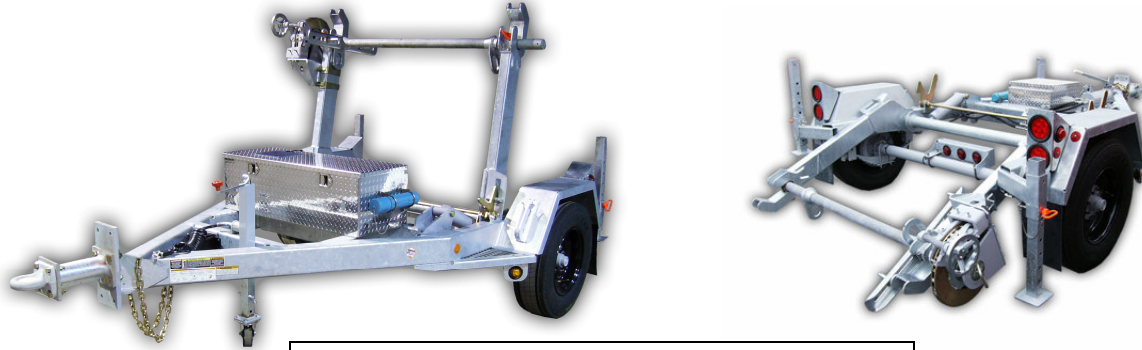

Trailer picture above may be shown with Optional Items.

<b>General:</b>	GVWR:	9000 lbs.
	GAWR:	8000 lbs. (per axle)
	Empty Weight:	2460 lbs.
	Total Capacity:	6500 lbs.
	Unladen Hitch Wt	370 lbs. approx.
	Overall Dimensions:	149 7/8" x 95 15/16" x 78 13/16" (L x W x H)
	Reel Opening Dimensions:	62 1/2" x 60 1/2" (L x W)
	Hitch:	3" Eye, 4 Bolt, 60,000 lb. Gross Trailer Wgt.
	Safety Chains:	3/8" Grade 70 w/ 3/8" Clevis Hooks and Safety Latches
<b>Running Gear:</b>	Tires:	Size: 245/70R 17.5 LRH
	Wheels:	17.5 x 6.75" with 8 bolts on a 6.5" bolt circle
	Brakes:	Electric
	Axles:	8000 lbs. Dexter Underslung Type
<b>Frame:</b>	Frame Rails:	6 x 4 x 1/4" Wall Tube ASTM A500B
	Cross Members:	6 x 4 x 1/4" Steel Tubing ASTM A500
<b>Reel Carrier:</b>	Reel Size:	Max. 54" wide x 82" dia.
	Reel Shaft:	2 1/2" Diameter Galvanized Steel
	Tensioning Brake:	16" Ventilated Bronze Manual Disk Brake
		Integrated power arm with adjustable pins, integrated tapered bushing and lift point
		Locking collar with jam bolts, integrated lift point and integrated tapered bushing.
<b>HPU:</b>	Electric over Hydraulic	12v DC, 1.5 gal reservoir, Pendant control with cable, 1.25 gpm. @2400psi.
		Two deep cycle batteries with solar pulse maintainer. Unit enclosed in lockable ATP box with lockable lid and automotive type weather stripping. Box has separate, vented compartment for batteries with hold downs
<b>Finish:</b>		<i>Hot dipped galvanizing</i>
<b>Electrical:</b>	Wire Harness:	No Internal Splices, enclosed in protective loom.
	Breakaway system:	To Federal DOT standards w/ solar maintainer
	Electrical Connection:	7 pin plug
	Lighting/Conspicuity:	Lighting To Federal D.O.T. Standards. Conspicuity tape where practicable
<b>Other:</b>	Tongue jack:	7000 lb. Capacity, Dropfoot Pivot Sidewind
	Registration holder:	water tight
<b>Special Features:</b>	(2) Rear Stabilizers, Wheel Chock Holder, (2) Frame Steps, Hitch Extension, (2) 3000 psi Hydraulic Cylinders, Pump, Bolt on (3) Bar Light Box	
<b>Optional Equipment:</b>	6.5 HP HPU	